


PAT testing made as easy as ABC using the KT72 with automatic test sequences



A Plug in appliance




B Select test



C Press start and read the results

Tri colour LED indication for earth bond.

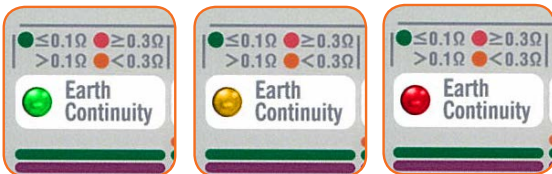

Green	Amber	Red
All Appliances PASS	Appliances with long mains leads and extension leads PASS	Earth Continuity greater than 0.3 ohm - FAIL

- Automatic Test Sequences
- Battery Powered – Convenient for the more awkwardly located appliances
- Conducts all mandatory Code of Practice Tests **plus** Substitute Leakage.
 - Earth Continuity
 - Insulation
- Suitable for testing IT equipment
 - 200mA earth bond (in both polarities)
 - Selectable insulation test voltage 500V or 250V
- Pass / Fail LEDs **and** LCD for results display
- Tests 110V appliances with optional adaptors
- Includes extension lead adaptor and earth bond test lead
- Lid protects the instrument when not in use
- Convenient test lead pouch