

⚠ Safety KEWSTICK UNO & KEWSTICK DUO

Read all these instructions before use

- Do not rely on the tester to detect the presence of voltage or absence of voltage for safety purposes. A single pole non-contact detector such as this tester is NOT suitable to determine if a circuit is hazardous. A two pole voltage tester is required for this.
- This product is designed for use by a competent person with appropriate training.
- Do not use the product if there is any sign of cracks or other damage - to clean use only a dry cloth.
- Use only on electrical systems within the specified voltage range (50 - 600VAC) - always test for correct operation on a known live voltage source before and after use.
- Always hold the Voltage Indicator firmly and behind the finger barrier to avoid possible slipping onto a live conductor.
- To maintain integrity of the category rating never move the tip into any electrical field beyond the clearly marked CAT IV ring on the tip.
- When testing flexible cables move the tip along the cable as the typical twisted construction of cables means the voltage field from the live and the neutral can cancel each other out giving a false indication.
- The tester may not indicate a live conductor within steel boxes, trunking, conduit or SWA (Steel Wire Armoured) cables.
- The tester must be used in accordance with these instructions - it must not be used in any other non-intended way.
- When installing batteries observe correct polarity, do not mix old and new batteries. Dispose of used batteries in accordance with local regulations - never incinerate batteries.

Instructions KEWSTICK UNO

Flashing red LED
warning tone
indicates volts present.

On/Off switch - press for power on the torch will illuminate - for power off briefly hold the switch, torch will turn off. (Auto power off will operate after approximately 5 minutes if no activity is detected).

Pocket clip

Battery Installation - Lift clip and slide cover back for access to battery compartment. The unit requires 2 AAA batteries (included when unit is supplied new) - always replace with good quality alkaline batteries.




Instructions KEWSTICK DUO

On/Off switch - press for power on the torch will illuminate - for power off briefly hold the switch, torch will turn off. (Auto power off will operate after approximately 5 minutes if no activity is detected).

Flashing red LED
warning tone
indicates volts present.

Sensitivity Attenuation button - hold down to reduce the sensitivity of the Voltage Detection System. This unique feature is very useful for tracing or identifying live conductors in bunched or crowded cables.

Pocket clip

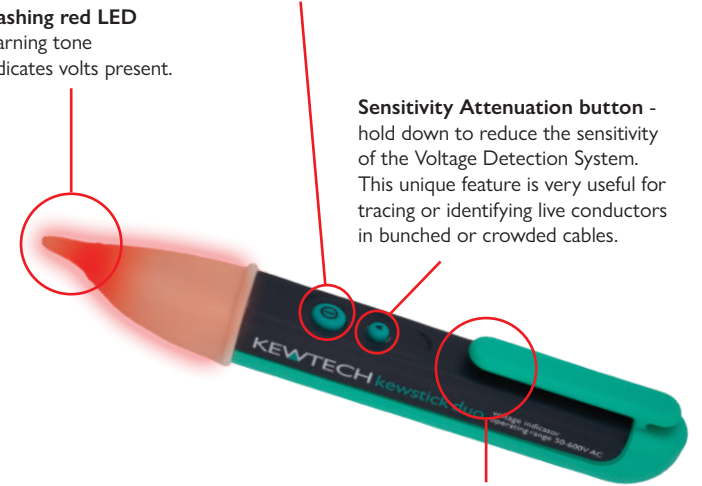

Product features KEWSTICK UNO


- Bright red LED indication and tone of live voltage field detected.
- Balanced sensitivity for more accurate detection.
- Robust construction.
- Bright LED torch.

Product features KEWSTICK DUO

- Unique Dual Sensitivity for improved detection of live conductors.
- Power On/Off switch for longer battery life.
- Auto Power Off to further extend battery life.
- Audible and (Red) LED indication of correct operation and warning of volts present.
- LED torch does not work when batteries low

Specifications & Markings

KEWSTICK UNO & DUO

- Safety complies with BSEN 61010 CAT IV 600 V
-  - Double insulated
- Operating Range 50 - 600 V AC
- Operating & Storage Temperature -10 to 50° C
- Humidity max 80%
- Batteries 2x AAA
-  - Conforms to EU Standards
-  - Confirms to UK Standards
-  - Product should be recycled as electronic waste

Kewtech Corporation LTD
Sunningdale, SL5 0EF
0345 646 1404
sales@kewtechcorp.com

kewtechcorp.com

KEWTECH

Instruction Manual

KEWSTICK UNO

So easy to use

KEWSTICK DUO

With unique dual sensitivity

