


## KEWEVA

EV charging point testing adapter

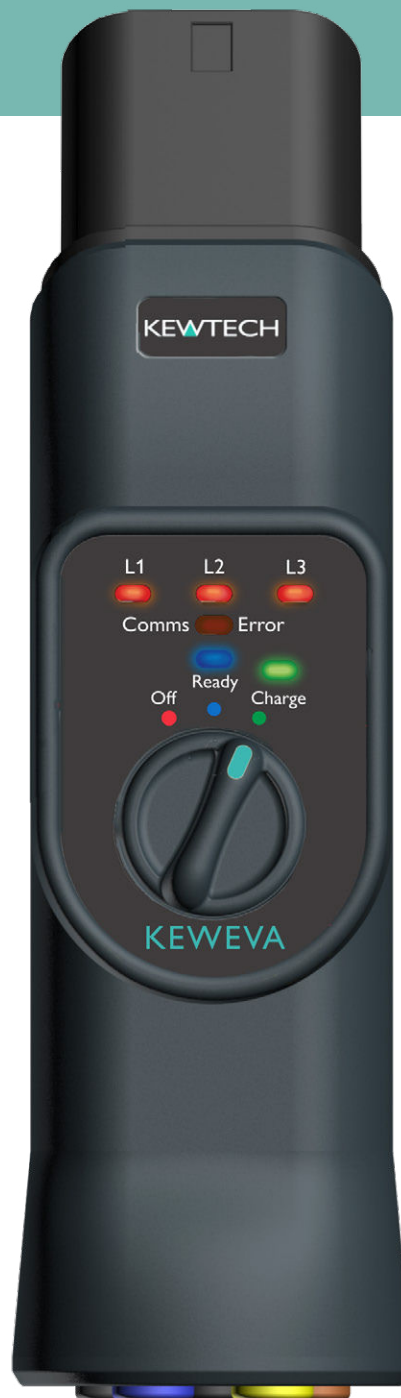

### PRODUCT DATA SHEET

#### KEWEVA

#### EV CHARGING POINT TESTING ADAPTER

- Suitable for single & three phase charging equipment
- Uses standard 4 mm connectors rated at 10 A for testing purposes
- Red LEDs indicate live status per phase
- Works with any MFT with EV charging point testing capabilities
- Incorporates an IEC 62196-2 type 2 connector for EV charging units
- Single rotary dial controls the CP status simulation: standby, ready & charging
- Checks the charging station's PWM signal is at 1 KHz, confirmed by a blue LED (patent applied for)
- Separate RED LED indicates when voltage is applied to output connectors
- Supplied with durable carry case

#### ACCESSORIES

- Carry case
- Manual

### SPECIFICATIONS

<b>Input Voltage</b>	Max 250 V (single phase), Max 430 V (three phase) 50/60Hz
<b>Measurement Category</b>	BSEN 61010 CAT II 300V
<b>Current carrying</b>	Max 10 A for intermittent testing purposes only
<b>CP States simulation</b>	A, B, C
<b>EV Charger connection type</b>	IEC62196-2 Type 2 male
<b>Working temperature</b>	0 - 40° C
<b>Storage temperature</b>	-10 - 50° C
<b>Humidity</b>	0 - 80% RH